


K-GROSSDRUCKREGLER

Large pressure regulators

HANSA FLEX

Osobine

Ulazni pritisak	Max. 40 bar
Temperatura medija	max. 60 °C
Temperatura okoline	Max. 90 °C
Protok	2500 l/min
Zaptivni materijal	NBR
Kućište	Aluminium
Merenje vrednosti protoka	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

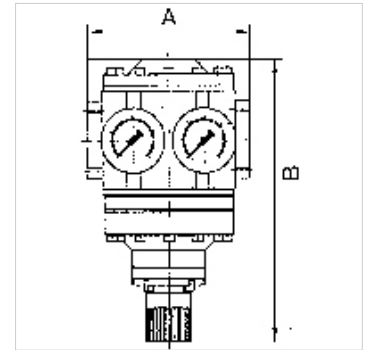

Napomena

Ostali podaci na upit.

Opis

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the button down. We recommend always using these controllers in conjunction with our K-07250615 and K-07250615 filters.

Artikal

Naziv	Navoj	Opseg regulacije	A (mm)	B	DN
K- 07 25 08 11	G 1 1/2	0.5 - 6 bar	180,0	246,0 mm	50
K- 07 25 08 12	G 1 1/2	0.5 - 10 bar	180,0	246,0 mm	50
K- 07 25 08 13	G 1 1/2	0.5 - 16 bar	180,0	246,0 mm	50
K- 07 25 08 14	G 1 1/2	0.5 - 25 bar	180,0	246,0 mm	50
K- 07 25 08 15	G 2	0.5 - 6 bar	160,0	246,0 mm	50
K- 07 25 08 16	G 2	0.5 - 10 bar	160,0	246,0 mm	50
K- 07 25 08 17	G 2	0.5 - 16 bar	160,0	246,0 mm	50
K- 07 25 08 18	G 2	0.5 - 25 bar	160,0	246,0 mm	50

Rezervni delovi

K-HALTERBAUSATZ	Holder
K-VERSCHLEI-SATZ	Set of wearing parts
K-XV AGM 2	Double nipples, parallel male thread