# K-HOCHLEIST DRUCKREGLER


Heavy-duty pressure regulators

HANSA FLEX

## Osobine

| | |
|---|---|
| **Ulazni pritisak** | Max. 25 bar |
| **Temperatura medija** | max. 60 °C |
| **Temperatura okoline** | Max. 60 °C |
| **Protok** | 50000 l/min |
| **Zaptivni materijal** | NBR |
| **Kućište** | Aluminium, painted silver |
| **Merenje vrednosti protoka** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |



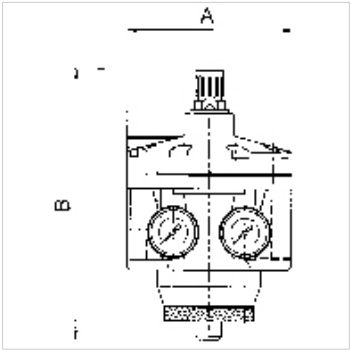


## Napomena

Ostali podaci na upit.

## Opis

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving designfor very high flow rates. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the knob down. We recommend always using these controllers in conjunction with our K-07250607 and K-07250609 filters.

## Artikal

| Naziv | Navoj | Opseg regulacije | A (mm) | B | DN |
|---|---|---|---|---|---|
| **K- 07 25 08 03** | G 1 1/2 | 0.1 - 3 bar | 188,0 | 261,0 mm | 50 |
| **K- 07 25 08 04** | G 1 1/2 | 0.2 - 6 bar | 188,0 | 261,0 mm | 50 |
| **K- 07 25 08 05** | G 1 1/2 | 0.5 - 10 bar | 188,0 | 261,0 mm | 50 |
| **K- 07 25 08 06** | G 1 1/2 | 0.5 - 16 bar | 188,0 | 261,0 mm | 50 |
| **K- 07 25 08 07** | G 2 | 0.1 - 3 bar | 160,0 | 261,0 mm | 50 |
| **K- 07 25 08 08** | G 2 | 0.2 - 6 bar | 160,0 | 261,0 mm | 50 |
| **K- 07 25 08 09** | G 2 | 0.5 - 10 bar | 160,0 | 261,0 mm | 50 |
| **K- 07 25 08 10** | G 2 | 0.5 - 16 bar | 160,0 | 261,0 mm | 50 |

## Rezervni delovi

| | |
|---|---|
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-LOESBARE DOPPELNIPPEL MS** | Double nipples |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*