


# K-WV 3/2 ELK 24 VDC HANSA

3/2-way valves, electrically operated, with 24 VDC / 2.5 W solenoid

**HANSA FLEX**

## Osobine

|   |   |
|---|---|
| Ulazni pritisak                                 | 2 - 10 bar                                      |
| Temperaturni opseg                              | -10 °C to +50 °C                                |
| Mediji  | Komprimovani vazduh                             |
| Kapacitet privlačenja naizmjeničnog napona 50Hz | 2,2 VA  |
| Radni ciklus                                    | ED 100 %  |
| Priključak na električnu mrežu                  | Connector type C, ISO 15217, 2 poles +PE        |
| Kapacitet držanja naizmjeničnog napona 50Hz     | 1,6 VA  |
| Apsorbovana snaga DC                            | 2,5 W   |
| Vrsta zaštite                                   | IP 65   |
| Priključni navoj                                | Material: Die-cast zinc                         |
| Kućičšte  | Material: Grivory® (PA 66)                      |
| Merenje vrednosti protoka                       | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

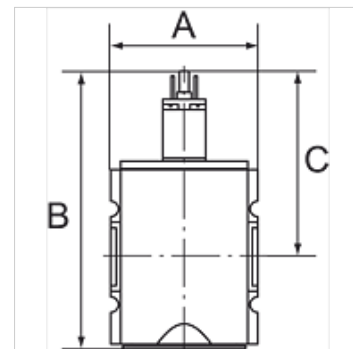

## Napomena

Ostali podaci na upit.

## Opis

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

## Napomene u vezi porudžbine

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Artikal

| Naziv          | Navoj | Oticanje | Protok (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|----------|----------------|--------|----------|--------|
| K- 07 25 11 05 | G 1/4 | 1/4      | 2000           | 52,0   | 117,8 mm | 84,8   |
| K- 07 25 11 06 | G 3/8 | 1/4      | 2000           | 52,0   | 117,8 mm | 84,8   |
| K- 07 25 11 31 | G 3/8 | 1/2      | 4500           | 63,0   | 150,3 mm | 93,8   |
| K- 07 25 11 32 | G 1/2 | 1/2      | 4500           | 63,0   | 150,3 mm | 93,8   |
| K- 07 25 11 37 | G 3/4 | 1/2      | 12500          | 85,0   | 177,7 mm | 110,7  |
| K- 07 25 11 38 | G 1   | 1/2      | 12500          | 85,0   | 177,7 mm | 110,7  |

## Pribor

|                             |   |
|-----------------------------|---|
| K-SCHALLDAE SINTERBR S      | Silencers, sintered bronze, slotted                                 |
| K-SCHALLDAE SINTERBR GE MS1 | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Rezervni delovi

|                         |                            |
|-------------------------|----------------------------|
| K-HALTERBAUSATZ HANSA   | Holder HANSA               |
| K-VORSTEUERVENTIL HANSA | Replacement solenoid HANSA |
| K-GERAETESTECKER FORM C | Connector                  |