K-WV 3/2 ELK 24 VDC HANSA


3/2-way valves, electrically operated, with 24 VDC / 2.5 W solenoid

HANSA FLEX

Osobine

Ulazni pritisak	2 - 10 bar
Temperaturni opseg	-10 °C to +50 °C
Mediji	Komprimovani vazduh
Kapacitet priviačenja naizmeničnog napona 50Hz	2,2 VA
Radni ciklus	ED 100 %
Priključak na električnu mrežu	Connector type C, ISO 15217, 2 poles +PE
Kapacitet držanja naizmeničnog napona 50Hz	1,6 VA
Apsorbovana snaga DC	2,5 W
Vrsta zaštite	IP 65
Priključni navoj	Material: Die-cast zinc
Kućište	Material: Grivory® (PA 66)
Merenje vrednosti protoka	At P2 = 6 bar, pressure drop Δp = 1 bar



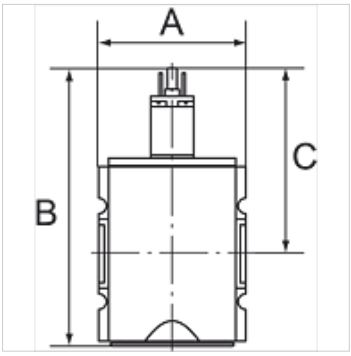

Napomena

Ostali podaci na upit.

Opis

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

Napomene u vezi porudžbine

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Artikal

Naziv	Navoj	Oticanje	Protok (L/min)	A (mm)	B	C (mm)
K- 07 25 11 05	G 1/4	1/4	2000	52,0	117,8 mm	84,8
K- 07 25 11 06	G 3/8	1/4	2000	52,0	117,8 mm	84,8
K- 07 25 11 31	G 3/8	1/2	4500	63,0	150,3 mm	93,8
K- 07 25 11 32	G 1/2	1/2	4500	63,0	150,3 mm	93,8
K- 07 25 11 37	G 3/4	1/2	12500	85,0	177,7 mm	110,7
K- 07 25 11 38	G 1	1/2	12500	85,0	177,7 mm	110,7

Pribor

K-SCHALLDAE SINTERBR S	Silencers, sintered bronze, slotted
K-SCHALLDAE SINTERBR GE MS1	Silencers, sintered bronze, with brass hexagon nut and brass thread

Rezervni delovi

K-HALTERBAUSATZ HANSA	Holder HANSA
K-VORSTEUERVENTIL HANSA	Replacement solenoid HANSA
K-GERAETESTECKER FORM C	Connector

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.