
# K-BEFUELLEINHEIT 230V AC HANSA

Filling units, electrically operated, with 230 VAC / 5= Hz solenoid, adjustable filling time

## Osobine

| | |
|---|---|
| **Ulazni pritisak** | 2 - 10 bar |
| **Temperaturni opseg** | -10 °C to +50 °C |
| **Mediji** | Komprimovani vazduh |
| **Kapacitet privlačenja naizmeničnog napona 50Hz** | 2,2 VA |
| **Radni ciklus** | ED 100 % |
| **Priključak na električnu mrežu** | Connector type C, ISO 15217, 2 poles +PE |
| **Kapacitet držanja naizmeničnog napona 50Hz** | 1,6 VA |
| **Apsorbovana snaga DC** | 2,5 W |
| **Vrsta zaštite** | IP 65 |
| **Priključni navoj** | Material: Die-cast zinc |
| **Kućište** | Material: Grivory® (PA 66) |
| **Merenje vrednosti protoka** | At P2 = 6 bar, pressure drop Δp = 1 bar |



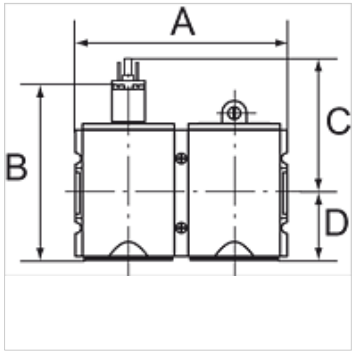


## Napomena

Ostali podaci na upit.

## Opis

The filling unit protects devices connected downstream by ensuring a gradual build-up of pressure. The unit consists of a 3/2-way valve and a filling valve (start-up valve). It is connected and disconnected by means of the 3/2-way valve. The filling time can be altered by turning the adjusting screw.

## Napomene u vezi porudžbine

Filling units are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Artikal

| Naziv | Navoj | Oticanje | Protok (L/min) | A (mm) | B | C (mm) | D (mm) |
|---|---|---|---|---|---|---|---|
| **K- 07 25 11 03** | G 1/4 | 1/4 | 1300 | 104,0 | 117,8 mm | 84,8 | 33,0 |
| **K- 07 25 11 04** | G 3/8 | 1/4 | 1300 | 104,0 | 117,8 mm | 84,8 | 33,0 |
| **K- 07 25 11 29** | G 3/8 | 1/2 | 3400 | 126,0 | 150,3 mm | 93,8 | 56,5 |
| **K- 07 25 11 30** | G 1/2 | 1/2 | 3400 | 126,0 | 150,3 mm | 93,8 | 56,5 |
| **K- 07 25 11 51** | G 3/4 | 1/2 | 8750 | 170,0 | 177,7 mm | 110,7 | 67,0 |
| **K- 07 25 11 52** | G 1 | 1/2 | 8750 | 170,0 | 177,7 mm | 110,7 | 67,0 |

## Pribor

| | |
|---|---|
| **K-SCHALLDAE SINTERBR S** | Silencers, sintered bronze, slotted |
| **K-SCHALLDAE SINTERBR GE MS1** | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Rezervni delovi

| | |
|---|---|
| **K-HALTERBAUSATZ HANSA** | Holder HANSA |
| **K-VORSTEUERVENTIL HANSA** | Replacement solenoid HANSA |
| **K-GERAETESTECKER FORM C** | Connector |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*