


K-DRG DRVS HANSA

Pressure regulators with continuous pressure supply

HANSA FLEX

Osobine

| | |
|-----------------------------|---|
| Ulazni pritisak | Max. 16 bar |
| Temperaturni opseg | -10 °C to +50 °C |
| Mediji | Komprimovani vazduh |
| Priključni navoj | Material: Die-cast zinc |
| Kučište | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Sopstvena potrošnja vazduha | only G3/4, G1 Max. 1.5 l/min (depending on secondary pressure) |
| Merenje vrednosti protoka | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

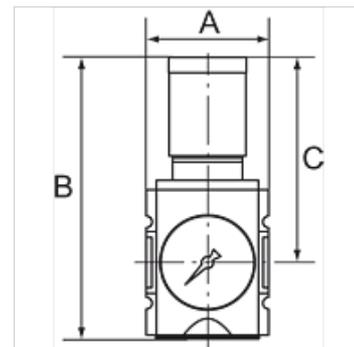

Napomena

Ostali podaci na upit.

Opis

Diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for mounting side by side. By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line. The regulator button can be latched and locked.

Napomene u vezi porudžbine

The price does not include a key lock. Please order separately.

Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) | Konstrukciona veličina |
|----------------|-------|------------------|----------------|--------|----------|--------|------------------------|
| K- 07 25 02 51 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 52 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 53 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 54 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 55 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 56 | G 1/4 | 0.5 - 16 bar | 2200 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 69 | G 3/8 | 0.1 - 1 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 70 | G 3/8 | 0.1 - 2 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 71 | G 3/8 | 0.2 - 4 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 72 | G 3/8 | 0.5 - 8 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 73 | G 3/8 | 0.5 - 10 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 74 | G 3/8 | 0.5 - 16 bar | 2600 | 52,0 | 128,5 mm | 95,5 | 1 |
| K- 07 25 02 57 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 58 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 59 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 60 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 61 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 62 | G 3/8 | 0.5 - 16 bar | 4300 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 63 | G 1/2 | 0.1 - 1 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 64 | G 1/2 | 0.1 - 2 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 65 | G 1/2 | 0.2 - 4 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 66 | G 1/2 | 0.5 - 8 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 67 | G 1/2 | 0.5 - 10 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |
| K- 07 25 02 68 | G 1/2 | 0.5 - 16 bar | 5000 | 63,0 | 149,5 mm | 110,0 | 2 |

Pribor

K-STECKSCHLOSS Key lock

Rezervni delovi

| | |
|--------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |