


K-PRAEZI DRG DRUCKVER HANSA

Precision pressure regulators with continuous pressure supply

HANSA FLEX

Osobine

| | |
|-----------------------------|---|
| Ulazni pritisak | Max. 16 bar |
| Temperaturni opseg | -10 °C to +50 °C |
| Mediji | Komprimovani vazduh |
| Priključni navoj | Material: Die-cast zinc |
| Kućičšte | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Sopstvena potrošnja vazduha | 2.6 l/min at P2 = 6 bar (depending on secondary pressure) |
| Merenje vrednosti protoka | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

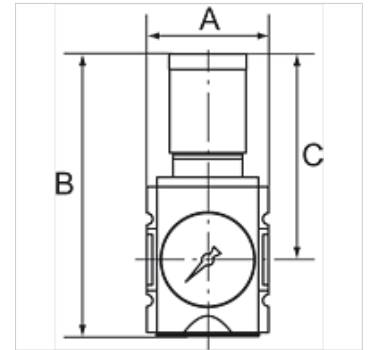

Napomena

Ostali podaci na upit.

Opis

Precision diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for mounting side by side.
By assembling two or more controllers together, it is possible to supply several working air circuits with different pressures via a single supply line.

Napomene u vezi porudžbine

The price does not include a key lock. Please order separately.

Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) |
|----------------|-------|------------------|----------------|--------|----------|--------|
| K- 07 25 09 66 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 67 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 68 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 69 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 70 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 71 | G 3/8 | 0.1 - 1 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 72 | G 3/8 | 0.1 - 2 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 73 | G 3/8 | 0.2 - 4 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 74 | G 3/8 | 0.5 - 8 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 75 | G 3/8 | 0.5 - 10 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 76 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 77 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 78 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 79 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 80 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 81 | G 1/2 | 0.1 - 1 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 82 | G 1/2 | 0.1 - 2 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 83 | G 1/2 | 0.2 - 4 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 84 | G 1/2 | 0.5 - 8 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 85 | G 1/2 | 0.5 - 10 bar | 5000 | 63,0 | 149,5 mm | 110,0 |

Pribor

K-STECKSCHLOSS Key lock

Rezervni delovi

| | |
|--------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |