

K-FIILTER INLINE

Filters

Osobine

Ulazni pritisak	Max. 18 bar
Temperaturni opseg	0 °C to +80 °C
Filterska jedinica	36,00 µm
Filter	Nickel-plated brass
Kućište	Brass
ostali delovi	NBR



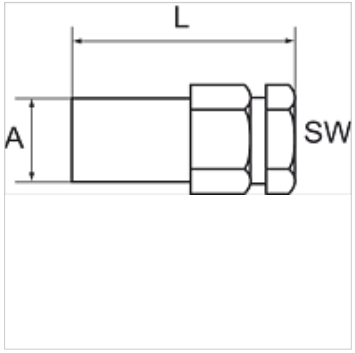

Napomena

Ostali podaci na upit.

Opis

For integration in a pneumatic system if different system
sections or tools require different air qualities.

Artikal

Naziv	Navoj	A (mm)	L (mm)	SW (mm)
K- 07 25 05 72	G 1/8 female/female	16,0	36,0	17
K- 07 25 05 73	G 1/4 female/female	18,0	41,0	19
K- 07 25 05 74	G 3/8 female / female	22,0	53,0	24
K- 07 25 05 75	G 1/2 female/female	28,4	62,0	30
K- 07 25 05 76	G 1/8 female/male	16,0	36,0	17
K- 07 25 05 77	G 1/4 female/male	18,0	41,0	19
K- 07 25 05 78	G 3/8 female / male	22,0	53,0	24
K- 07 25 05 79	G 1/2 female/male	28,4	62,0	30

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.