


K-VT SCHMAL MULTIFIX

Manifolds - narrow design

HANSA FLEX

Osobine

| | |
|---------------------------|--|
| Ulazni pritisak | Max. 16 bar |
| Temperatura medija | max. 60 °C |
| Temperatura okoline | Max. 60 °C |
| Zaptivni materijal | NBR |
| Kućište | Die-cast zinc |
| Merenje vrednosti protoka | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

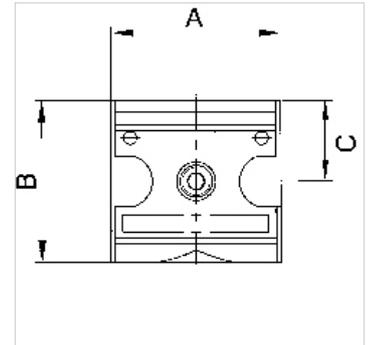

Napomena

Flow rate l/min at P → A

Ostali podaci na upit.

Opis

Wide or narrow, four-way manifolds.

Artikal

| Naziv | Outlets | Navoj | Protok (L/min) | A (mm) | B | C (mm) |
|----------------|---------------------------|-------|----------------|--------|---------|--------|
| K- 07 25 11 82 | 3 x 1/4, 1 x 1/8 | G 1/4 | 3300 | 34,8 | 52,0 mm | 26,0 |
| K- 07 25 11 83 | 1 x 3/8, 2 x 1/4, 1 x 1/8 | G 1/2 | 11000 | 38,8 | 67,0 mm | 33,5 |

Pribor

| | |
|-------------------------------------|---|
| K-DRS WECHSELKONTAK ANFLANSCHBAR DS | Pressure switches, changeover type, suitable for flange mounting K-07302861 |
| K-ZUBEH HANSA | Accessories for pressure switch HANSA |

Rezervni delovi

| | |
|---------------------|-----------------|
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |