


# K-VT BREIT MULTIFIX

Manifolds - wide design

**HANSA FLEX**

## Osobine

|                           |  |
|---------------------------|--|
| Ulazni pritisak           | Max. 16 bar  |
| Temperatura medija        | max. 60 °C   |
| Temperatura okoline       | Max. 60 °C   |
| Zaptivni materijal        | NBR  |
| Kućište                   | Die-cast zinc                                      |
| Merenje vrednosti protoka | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

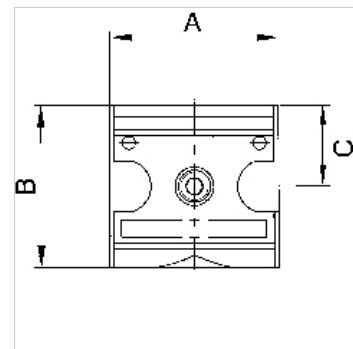

## Napomena

Flow rate l/min at P → A

Ostali podaci na upit.

## Opis

Wide or narrow, four-way manifolds.

## Artikal

| Naziv          | Outlets          | Navoj | Protok (L/min) | A (mm) | B       | C (mm) | Konstrukciona veličina |
|----------------|------------------|-------|----------------|--------|---------|--------|------------------------|
| K- 07 25 11 73 | 4 x 1/4          | G 1/4 | 2500           | 47,8   | 52,0 mm | 26,0   | 1                      |
| K- 07 25 11 74 | 4 x 1/4          | G 3/8 | 2500           | 47,8   | 52,0 mm | 26,0   | 1                      |
| K- 07 25 11 75 | 2 x 1/4, 2 x 1/2 | G 1/2 | 11000          | 68,8   | 67,0 mm | 33,5   | 2                      |
| K- 07 25 11 76 | 2 x 1/4, 2 x 1/2 | G 3/4 | 11000          | 68,8   | 67,0 mm | 33,5   | 2                      |

## Pribor

|                                     |   |
|-------------------------------------|---|
| K-DRS WECHSELKONTAK ANFLANSCHBAR DS | Pressure switches, changeover type, suitable for flange mounting K-07302861 |
| K-ZUBEH HANSA                       | Accessories for pressure switch HANSA                                       |

## Rezervni delovi

|                     |                 |
|---------------------|-----------------|
| K-KOPPELPAKET MEHR  | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |