

# K-ANFAV MULTIFIX MINI

Start-up valves

## Osobine

| | |
|---|---|
| **Ulazni pritisak** | Min. 2.5 bar, max. 16 bar |
| **Temperatura medija** | max. 60 °C |
| **Temperatura okoline** | Max. 60 °C |
| **Protok** | 1600 l/min |
| **Zaptivni materijal** | NBR |
| **Kućište** | Die-cast zinc |
| **Merenje vrednosti protoka** | At P1 = 6 bar and pressure drop Δp = 1 bar |

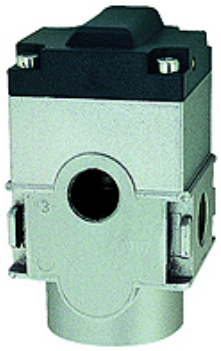




## Napomena

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Ostali podaci na upit.

## Opis

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

## Artikal

| Naziv | Navoj | A (mm) | B | C (mm) | D (mm) |
|---|---|---|---|---|---|
| **K- 07 25 11 53** | G 1/4 | 45,0 | 77,5 mm | 48,5 | 29,0 |

## Pribor

| | |
|---|---|
| **K-HALTERBAUSATZ** | Holder |

## Rezervni delovi

| | |
|---|---|
| **K-KOPPELPAKET MEHR** | Coupling packet |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*