


K-3/2-BKR MULTIFIX MINI

Ball valves

HANSA FLEX

Osobine

| | |
|----------------------------|--|
| Temperatura medija | max. 60 °C |
| Temperatura okoline | Max. 60 °C |
| Aktiviranje | Twist knob, rotatable 90° |
| Protok | 1800 l/min |
| Priključak za odzračivanje | Silencer G 1/4 |
| Zapivni materijal | NBR |
| Kućište | Die-cast zinc |
| Merenje vrednosti protoka | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

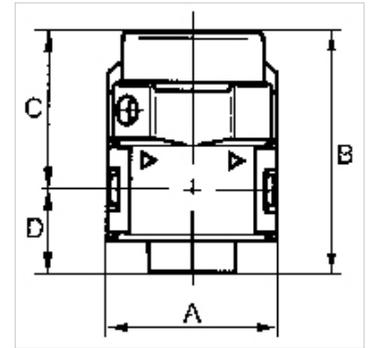

Napomena

If several devices in the »multiflex-mini« Series are assembled together, the maximum working pressure is 12 bar.

Ostali podaci na upit.

Opis

Rotary switch can be turned 90°, lockable, with relief port

Artikal

| Naziv | Navoj | A (mm) | B | C (mm) | D (mm) | Konstrukciona veličina |
|----------------|-------|-----------|---------|-----------|-----------|------------------------|
| K- 07 25 11 56 | G 1/8 | 40,0 | 57,6 mm | 37,6 | 20,0 | 0 |
| K- 07 25 11 57 | G 1/4 | 40,0 | 57,6 mm | 37,6 | 20,0 | 0 |

Rezervni delovi

| | |
|------------------------------|-------------------------------------|
| K-KOPPELPAKET MEHR | Coupling packet |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-SCHALLDAE SINTERBR SCHLITZ | Silencers, sintered bronze, slotted |