


# K-WTEH KOMBI PC-BEHÄLTER H ABLV

Combination service units with polycarbonate bowl and manual drain valve

**HANSA FLEX**

## Osobine

|                                |  |
|--------------------------------|--|
| Ulazni pritisak                | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)     |
| Temperatura medija             | max. 50 °C   |
| Temperatura okoline            | Max. 50 °C   |
| Širina pora u elementu filtera | 50 µm  |
| Zaptivni materijal             | NBR  |
| Kućiče                         | Die-cast zinc, Spring bonnet; PA                               |
| Naglavak za kapljanje          | PA   |
| Merenje vrednosti protoka      | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

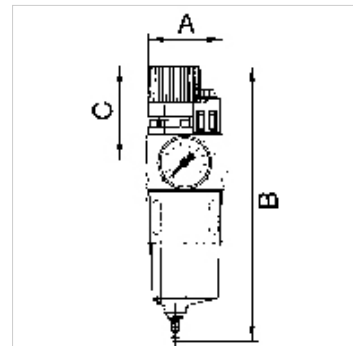

## Napomena

Ostali podaci na upit.

## Opis

A filter, pressure regulator and oil-mist lubricator combined in a single device with an extremely compact design. The pressure setting can be locked by pushing the knob down. Oil can be filled under pressure.

## Artikal

| Naziv          | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|------------------|----------------|--------|----------|--------|
| K- 07 25 08 44 | G 1/4 | 0.5 - 10 bar     | 1400           | 67,0   | 217,0 mm | 68,5   |
| K- 07 25 08 46 | G 1/4 | 0.5 - 16 bar     | 1000           | 67,0   | 217,0 mm | 68,5   |
| K- 07 25 08 48 | G 3/8 | 0.5 - 10 bar     | 1400           | 67,0   | 217,0 mm | 68,5   |
| K- 07 25 08 50 | G 3/8 | 0.5 - 16 bar     | 1000           | 67,0   | 217,0 mm | 68,5   |
| K- 07 25 08 52 | G 1/2 | 0.5 - 10 bar     | 1400           | 65,0   | 217,0 mm | 68,5   |
| K- 07 25 08 54 | G 1/2 | 0.5 - 16 bar     | 1000           | 65,0   | 217,0 mm | 68,5   |
| K- 07 25 08 56 | G 3/4 | 0.5 - 10 bar     | 3400           | 97,0   | 296,5 mm | 96,5   |
| K- 07 25 08 58 | G 3/4 | 0.5 - 16 bar     | 2800           | 97,0   | 296,5 mm | 96,5   |
| K- 07 25 08 60 | G 1   | 0.5 - 10 bar     | 3400           | 93,0   | 296,5 mm | 96,5   |
| K- 07 25 08 62 | G 1   | 0.5 - 16 bar     | 2800           | 93,0   | 296,5 mm | 96,5   |

## Rezervni delovi

|                          |  |
|--------------------------|--|
| K-HALTERBAUSATZ SERIE 81 | Holder for series 81                           |
| K-ERSATZBEHÄLTER KOMBI   | Spare tank                                     |
| K-SCHUTZKORB G           | Protective cage                                |
| K-VERSCHLEI-SATZ         | Set of wearing parts                           |
| K-TROPFAUFSATZ POLYCARBO | Drip attachment polycarbonate                  |
| K-TROPFAUFSATZ METALL    | Drip attachment metal                          |
| K-FILTERELEMENT          | Filter element                                 |
| K-ABLASSVENTIL AUTO      | Fully-automatic drain valve with Adapter G 1/8 |
| K-RD NIPPEL KURZ 1       | Reducing nipples, short type                   |
| K-XV AGM 2               | Double nipples, parallel male thread           |