


K-DRG STANDARD-MINI

Pressure regulators

HANSA FLEX

Osobine

| | |
|---------------------------|--|
| Ulazni pritisak | Max. 28 bar |
| Temperatura medija | max. 60 °C |
| Temperatura okoline | Max. 60 °C |
| Zaptivni materijal | NBR/TPU |
| Poklopac opruge | POM-brass |
| Kućište | Die-cast zinc, painted silver |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Ostali podaci | User manual on request |

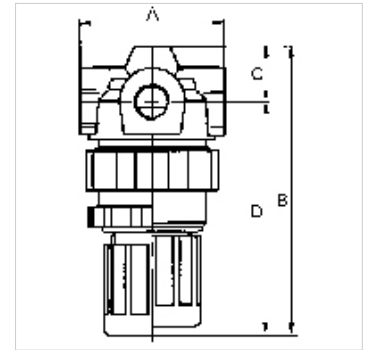

Opis

Reversible diaphragm pressure regulators with self-relieving design in compact design. The pressure setting can be locked by pushing the knob down.

Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) | D (mm) | DN |
|----------------|-------|------------------|----------------|--------|---------|--------|--------|----|
| K- 07 25 03 22 | G 1/8 | 0.15 - 3.5 bar | 340 | 43,0 | 72,5 mm | 9,5 | 63,0 | 5 |
| K- 07 25 03 23 | G 1/8 | 0.2 - 7.0 bar | 340 | 43,0 | 72,5 mm | 9,5 | 63,0 | 5 |
| K- 07 25 03 24 | G 1/8 | 0.5 - 10.0 bar | 340 | 43,0 | 72,5 mm | 9,5 | 63,0 | 5 |
| K- 07 25 03 25 | G 1/4 | 0.15 - 3.5 bar | 340 | 43,0 | 72,5 mm | 9,5 | 63,0 | 5 |
| K- 07 25 03 26 | G 1/4 | 0.2 - 7.0 bar | 340 | 43,0 | 72,5 mm | 9,5 | 63,0 | 5 |
| K- 07 25 03 27 | G 1/4 | 0.5 - 10.0 bar | 340 | 43,0 | 72,5 mm | 9,5 | 63,0 | 5 |

Rezervni delovi

| | |
|----------------------------|---|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTAFELMUTTER | Nut |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |
| K-VERSCHLEI-SATZ | Set of wearing parts |