


# K-WTEH 2-TLG PC-BEHAEL MANO STAN-MI

Service units, 2-piece with polycarbonate bowl and pressure gauge

**HANSA FLEX**

## Osobine

|                                |  |
|--------------------------------|--|
| Ulazni pritisak                | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)                             |
| Temperatura medija             | max. 60 °C   |
| Temperatura okoline            | Max. 60 °C   |
| Protok                         | 350 l/min (2-piece), 300 l/min (3-piece)   |
| Širina pora u elementu filtera | 5 µm   |
| Zapivni materijal              | NBR  |
| Kučište                        | Die-cast zinc, painted silver  |
| Naglavak za kapljanje          | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                                   |
| Drain valve                    | Semi-automatic for variant with polycarbonate bowl, Manual for variant with metal bowl |
| Merenje vrednosti protoka      | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar                         |

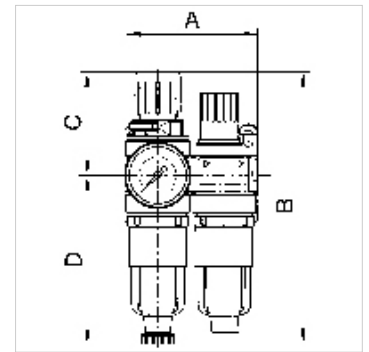

## Napomena

Ostali podaci na upit.

## Opis

Compact, two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

## Artikal

| Naziv          | Navoj | Opseg regulacije | A<br>(mm) | B        | C<br>(mm) | D<br>(mm) | DN |
|----------------|-------|------------------|-----------|----------|-----------|-----------|----|
| K- 07 25 14 89 | G 1/8 | 0.5 - 10 bar     | 85,0      | 167,0 mm | 65,0      | 102,0     | 5  |
| K- 07 25 14 91 | G 1/4 | 0.5 - 10 bar     | 85,0      | 167,0 mm | 65,0      | 102,0     | 5  |

## Rezervni delovi

|                                |   |
|--------------------------------|---|
| K-HALTERBAUSATZ                | Holder  |
| K-SCHALTAFELMUTTER             | Nut   |
| K-ERSATZBEHAELTER MULTI MINI   | Spare tank »multifix-mini« & »standard-mini«              |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter                                 |
| K-VERSCHLEI-SATZ               | Set of wearing parts                                      |
| K-FILTERELEMENT                | Filter element  |
| K-AUTOMAT ABLASSVENTIL         | Automatic drain valve                                     |
| K-TROPFAUFSATZ POLYCARBO       | Drip attachment polycarbonate                             |
| K-TROPFAUFSATZ METALL          | Drip attachment metal                                     |
| K-LOESBARE DOPPELNIPPEL MS     | Double nipples  |
| K-XV AGM MS NI                 | Double nipples, parallel male thread, nickel-plated brass |