


K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends

HANSA FLEX

Osobine

| | |
|---------------------------|---|
| Ulazni pritisak | Max. 25 bar |
| Temperatura medija | max. 50 °C |
| Temperatura okoline | Max. 50 °C |
| Zaptivni materijal | NBR |
| Poklopac opruge | POM-brass |
| Kućište | Die-cast zinc |
| Merenje vrednosti protoka | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

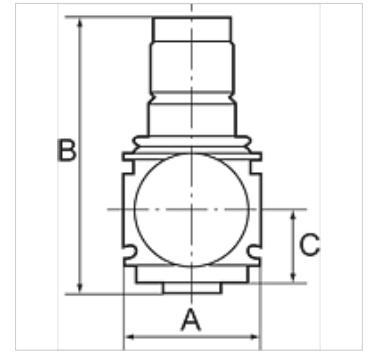

Napomena

Ostali podaci na upit.

Opis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.
By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

Napomene u vezi porudžbine

Pressure regulators are also available in lockable version. Please ask for more information.

Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) |
|----------------|-------|------------------|----------------|--------|---------|--------|
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |

Rezervni delovi

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts