


K-FI RUECKSPUEL M DRUCKREGLER

Back-flushing filters with pressure regulator

HANSA FLEX

Osobine

Ulazni pritisak	Max. 16 bar
Temperatura okoline	+5 °C to +40 °C
Temperatura vode min.	5 °C
Temperatura vode max.	30 °C
Širina pora u elementu filtera	90 µm (first filter element), 110 µm (second filter element)
Kućište	Brass
Časasto sito	Impact-resistant plastic
Kapacitet protoka	at $\Delta p = 0.2$ bar
Ostali podaci	DVGW Zertifikat

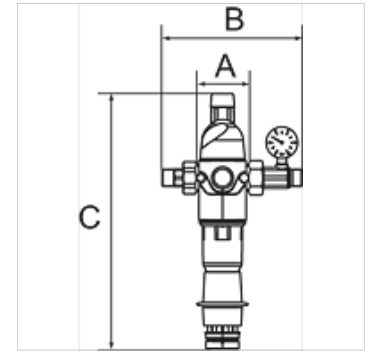

Napomena

Ostali podaci na upit.

Opis

Combined station for filtering and regulating the pressure of drinking and domestic water in addition to well, process and cooling water for once-through cooling systems, consisting of a diaphragm pressure regulator with a pressure-reduced single-seated valve and a back-flushing filter. The filter candle must be cleaned manually at regular intervals by back-flushing (flushing out dirt particles). Integrated back-flushing element with suction elements, back-flushing lever, wing lever for back-flushing element, hose connection for flushing water.

Artikal

Naziv	Navoj	DN	Opseg regulacije	kvs-vrednost protoka (m ³ /h)	A (mm)	B	C (mm)
K- 07 25 10 11	R 3/4	20	2 - 6 bar	3,0	79,7	213,0 mm	392,8
K- 07 25 10 12	R 1	25	2 - 6 bar	3,5	79,7	213,0 mm	392,8
K- 07 25 10 13	R 1 1/4	32	2 - 6 bar	4,0	79,7	213,0 mm	392,8

Rezervni delovi

K-FILTEREINSATZ	Filter insert
K-KUNSTSTOFFBEHAELTER	Plastic tank