


# K-WMV 3/2 MANU DREHKNOPF

3/2-way miniature valves, manually operated, with rotary knob (2 positions)

**HANSA FLEX**

## Osobine

Funkcija	NC
Radni pritisak	0,5 - 10 bara
Radna temperatura	-10 °C do +60 °C
Protok 6bara i 5bara	35 NI/min
Nominalni-Ø	2,5 mm
Pritisak aktivacije 6bara	8 N
Telo ventila	Aluminijum
Pritisni taster	Mesing, niklovan
Opruga	nerđajajući čelik
Zaptivni materijal	NBR

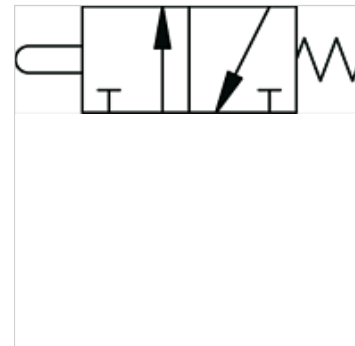

## Napomena

Ostali podaci na upit.

## Opis

Monostable (non-latching) and bistable (latching) versions available.

## Artikal

Naziv	Priključak	Aktiviranje
K- 07 15 00 54	4 mm bočno	monostable
K- 07 15 00 55	M 5 bočno	monostable
K- 07 15 00 56	4 mm bočno	bistabilno
K- 07 15 00 57	M 5 bočno	bistabilno