


K-WMV 3/2 STOESSEL

3/2-way miniature valves, with plunger

Osobine

| | |
|---------------------------|------------------|
| Radni pritisak | 0,5 - 10 bara |
| Radna temperatura | -10 °C do +60 °C |
| Protok 6bara i 5bara | 35 NI/min |
| Nominalni-Ø | 2,5 mm |
| Pritisak aktivacije 6bara | 8 N |
| Telo ventila | Aluminijum |
| Pritisni taster | Mesing, niklovan |
| Opruga | nerđajući čelik |
| Zaptivni materijal | NBR |

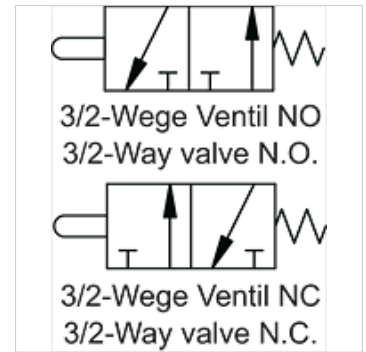

Napomena

Ostali podaci na upit.

Opis

Miniature valves, 3/2-way type, NC or NO.

Artikal

| Naziv | Priključak | Funkcija |
|----------------|------------|----------|
| K- 07 15 00 88 | 4 mm bočno | NO |
| K- 07 15 00 89 | M 5 bočno | NO |
| K- 07 15 00 90 | 4 mm bočno | NC |
| K- 07 15 00 91 | M 5 bočno | NC |