


K-DRV ABLD STECK C RAENDEL

Unidirectional flow control valves, outgoing air restriction (»C«), plug-in connector

HANSA FLEX

Osobine

| | |
|---|------------------------------------|
| Radni pritisak | maks. 10 bara |
| Temperaturni opseg | 0 °C to +70 °C |
| Šuplji zavrtnaj, obrtni rukavac, zavrtnaj za regulaciju | Nickel-plated brass |
| Unutrašnji delovi | Brass with a bare metal surface |
| Zaptivka O-prstena | NBR |
| Zaptivke (sa osiguračem) | Polyamide (glass fibre-reinforced) |

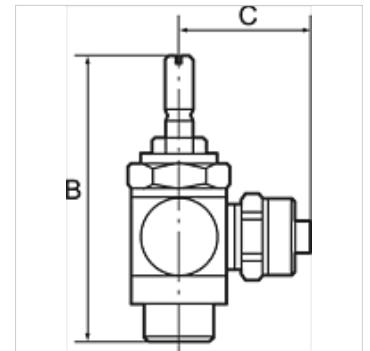

Napomena

Ostali podaci na upit.

Opis

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece.

Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted. On the version with a knurled screw, the set volumetric flow rate can be locked with the hexagon nut to obtain a fixed setting.

Artikal

| Naziv | C (mm) | za crevo | Navoj | SW | B (mm) |
|----------------|-----------|----------|-------|-------|-----------|
| K- 07 15 04 65 | 18,6 | 4 mm | M 5 | 8 mm | 38,9 |
| K- 07 15 04 66 | 21,7 | 6 mm | M 5 | 8 mm | 38,9 |
| K- 07 15 04 70 | 20,6 | 4 mm | G 1/8 | 14 mm | 42,4 |
| K- 07 15 04 71 | 22,7 | 6 mm | G 1/8 | 14 mm | 42,4 |
| K- 07 15 04 72 | 23,7 | 8 mm | G 1/8 | 14 mm | 42,4 |
| K- 07 15 04 68 | 24,2 | 6 mm | G 1/4 | 17 mm | 51,4 |
| K- 07 15 04 69 | 24,7 | 8 mm | G 1/4 | 17 mm | 51,4 |
| K- 07 15 04 67 | 26,8 | 10 mm | G 1/4 | 17 mm | 51,4 |