


K-DV STECK B SCHLITZ

Bidirectional flow control valves, air restriction at both ends (»B«), plug-in connector

HANSA FLEX

Osobine

| | |
|---|------------------------------------|
| Radni pritisak | maks. 10 bara |
| Temperaturni opseg | 0 °C to +70 °C |
| Šuplji zavrtnj, obrtni rukavac, zavrtnj za regulaciju | Nickel-plated brass |
| Unutrašnji delovi | Brass with a bare metal surface |
| Zaptivka O-prstena | NBR |
| Zaptivke (sa osiguračem) | Polyamide (glass fibre-reinforced) |

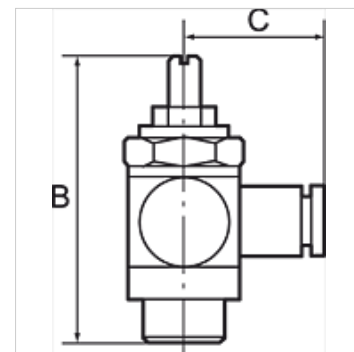

Napomena

Ostali podaci na upit.

Opis

For regulation of a cylinder piston speed at both ends and control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece for mounting directly. Compact type of construction, also ideal where space is restricted.

Artikal

| Naziv | C (mm) | za crevo | Navoj | SW | B (mm) |
|----------------|--------|----------|-------|-------|--------|
| K- 07 15 05 01 | 18,6 | 4 mm | M 5 | 8 mm | 24,5 |
| K- 07 15 05 02 | 21,7 | 6 mm | M 5 | 8 mm | 24,5 |
| K- 07 15 05 06 | 20,6 | 4 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 07 | 22,7 | 6 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 08 | 23,7 | 8 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 04 | 24,2 | 6 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 05 | 24,7 | 8 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 03 | 26,8 | 10 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 09 | 28,8 | 10 mm | G 3/8 | 20 mm | 50,0 |