


K-DV STECK B SCHLITZ

Bidirectional flow control valves, air restriction at both ends (»B«), plug-in connector

HANSA FLEX

Osobine

Radni pritisak	maks. 10 bara
Temperaturni opseg	0 °C to +70 °C
Šuplji zavrtnj, obrtni rukavac, zavrtnj za regulaciju	Nickel-plated brass
Unutrašnji delovi	Brass with a bare metal surface
Zaptivka O-prstena	NBR
Zaptivke (sa osiguračem)	Polyamide (glass fibre-reinforced)

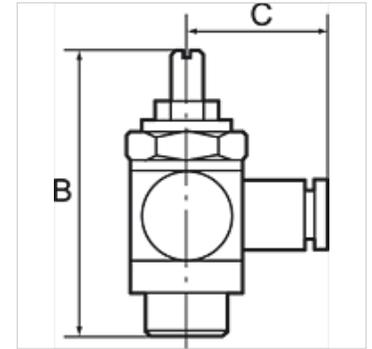

Napomena

Ostali podaci na upit.

Opis

For regulation of a cylinder piston speed at both ends and control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece for mounting directly. Compact type of construction, also ideal where space is restricted.

Artikal

Naziv	C (mm)	za crevo	Navoj	SW	B (mm)
K- 07 15 05 01	18,6	4 mm	M 5	8 mm	24,5
K- 07 15 05 02	21,7	6 mm	M 5	8 mm	24,5
K- 07 15 05 06	20,6	4 mm	G 1/8	14 mm	32,0
K- 07 15 05 07	22,7	6 mm	G 1/8	14 mm	32,0
K- 07 15 05 08	23,7	8 mm	G 1/8	14 mm	32,0
K- 07 15 05 04	24,2	6 mm	G 1/4	17 mm	40,0
K- 07 15 05 05	24,7	8 mm	G 1/4	17 mm	40,0
K- 07 15 05 03	26,8	10 mm	G 1/4	17 mm	40,0
K- 07 15 05 09	28,8	10 mm	G 3/8	20 mm	50,0