



# K-WFV 3/2 NICHT RASTEND FUS

3/2-way foot-operated valves (monostable, non-latching, with foot guard)

**HANSA FLEX**

## Osobine

|  |   |
|--|---|
| Radni pritisak                         | 2.5 - 10 bar                                |
| Temperaturni opseg                     | -10 °C to +60 °C                            |
| Protok pri 6,3 bara i $\Delta$ 0,5 bar | 60 NI/min (4 mm and M5), 640 NI/min (G 1/4) |
| Protok pri 6,3 bara i $\Delta$ 1 bar   | 95 NI/min (4 mm and M5), 840 NI/min (G 1/4) |

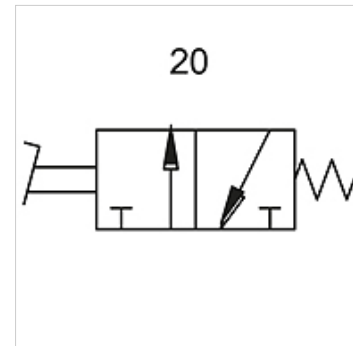

## Napomena

Ostali podaci na upit.

## Opis

Foot-operated valves, 3/2- and 5/2-way types, bistable or monostable (non-latching).

## Artikal

| Naziv          | Priključak | Broj plana uključivanja |
|----------------|------------|-------------------------|
| K- 07 15 00 19 | M 5        | 20                      |
| K- 07 15 00 20 | 4 mm       | 20                      |