


K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

Osobine

| | |
|---------------------|---|
| Mediji | Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Radni pritisak | Max. 10 bar |
| Pritisak reagovanja | 0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50) |
| Temperaturni opseg | -10 °C to +80 °C |
| Konstrukcija | Screwed joint between stainless steel barrel and heads |
| Klipnjača | C45 steel, hard chrome-plated |
| Cev | Anodised aluminium |
| Klipovi | Technopolymer |
| Zaptivni materijal | NBR |

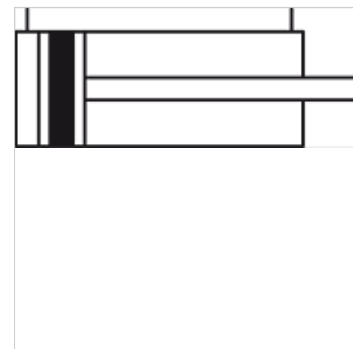

Napomena

Ostali podaci na upit.

Opis

Version with magnetic piston

Napomene u vezi porudžbine

Note: 500 mm is the maximum stroke available for the double-acting type.

Dodatne informacije

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

Artikal

| Naziv | Ø klipa | Hod (mm) | Priključak | Navoj klipnjače |
|----------------|---------|----------|------------|-----------------|
| K- 07 15 17 29 | 32 mm | 25 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 30 | 32 mm | 50 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 31 | 32 mm | 80 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 32 | 32 mm | 100 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 33 | 32 mm | 125 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 34 | 32 mm | 160 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 35 | 32 mm | 200 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 36 | 32 mm | 250 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 37 | 32 mm | 320 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 38 | 32 mm | 400 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 39 | 32 mm | 500 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 40 | 40 mm | 25 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 41 | 40 mm | 50 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 42 | 40 mm | 80 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 43 | 40 mm | 100 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 44 | 40 mm | 125 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 45 | 40 mm | 160 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 46 | 40 mm | 200 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 47 | 40 mm | 250 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 48 | 40 mm | 320 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 49 | 40 mm | 400 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 50 | 40 mm | 500 | G 1/4 | M 12 x 1.25 |
| K- 07 15 17 51 | 50 mm | 25 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 52 | 50 mm | 50 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 53 | 50 mm | 80 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 54 | 50 mm | 100 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 55 | 50 mm | 125 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 56 | 50 mm | 160 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 57 | 50 mm | 200 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 58 | 50 mm | 250 | G 1/4 | M 16 x 1.5 |

K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

Artikel

| Naziv | Ø klipa | Hod (mm) | Priključak | Navoj klipnjače |
|----------------|---------|----------|------------|-----------------|
| K- 07 15 17 59 | 50 mm | 320 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 60 | 50 mm | 400 | G 1/4 | M 16 x 1.5 |
| K- 07 15 17 61 | 50 mm | 500 | G 1/4 | M 16 x 1.5 |

Pribor

| | |
|---------------------------|--------------------------------------|
| K-FUSSBEFESTIGUNG 2 | Foot model |
| K-KOPFMUTTER DECKEL BODEN | Hexagon nut (for head) |
| K-GABELKOEPFER 4 | Fork model |
| K-GELENKAUGEN 5 | Rod eye model |
| K-SCHWENKLAGER 2 | Counter-hinge model |
| K-SENSORHALTER | Sensor support (with T-slot adapter) |
| K-SENSOREN T-NUT 1 | Sensor for T-slot |