

# K-SCHNELLENTLUEFTUNG

Quick-exhaust valves

**HANSA FLEX**

## Osobine

min. radni pritisak 0,5 bar



Radni pritisak maks. 12 bara

Radna temperatura Max. 80 °C

Opis navoja G thread acc. DIN EN ISO 228-1

Kućište Nickel-plated brass

Membrana Polyurethane

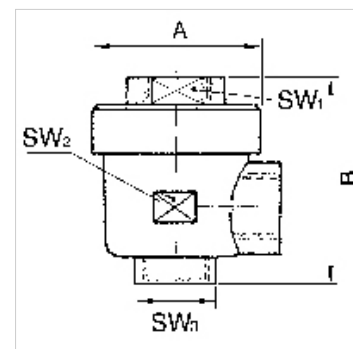

## Napomena

Ostali podaci na upit.

## Artikal

Naziv	Navoj	A (mm)	B (mm)	SW1 (mm)	SW2 (mm)	SW3 (mm)
K- 07 30 25 18	G 1/8	28,0	42,0	14	14	14
K- 07 30 25 17	G 1/4	33,0	53,0	19	19	19
K- 07 30 25 16	G 1/2	43,0	71,0	26	26	26

## Rezervni delovi

K-ERSATZ DICHT Replacement diaphragm, seal