


K-FI AK KOH POLYCARBONATBE MULTIFIX

Activated carbon filters with polycarbonate bowl

HANSA FLEX

Osobine

| | |
|---------------------------|---|
| Ulazni pritisak | Max. 16 bar |
| Temperatura medija | max. 60 °C |
| Temperatura okoline | Max. 60 °C |
| Zaptivni materijal | NBR |
| Uložak filtera | Activated carbon-POM |
| Kućište | Die-cast zinc |
| Drain valve | Semi-automatic |
| Sadržaj preostalog ulja | 0.005 mg/m ³ |
| Merenje vrednosti protoka | FA at P1 = 6 bar and $\Delta p = 0.2$ bar |

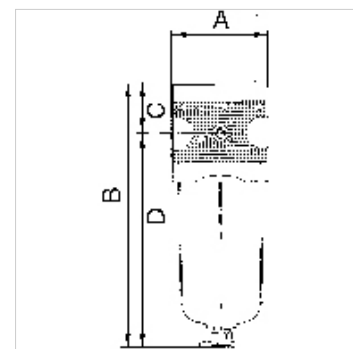

Napomena

Ostali podaci na upit.

Opis

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

Artikal

| Naziv | Navoj | Protok (L/min) | A (mm) | B (mm) | C (mm) | D (mm) | DN | Konstrukciona veličina |
|----------------|-------|----------------|--------|----------|--------|--------|----|------------------------|
| K- 07 25 10 48 | G 1/4 | 380 | 47,8 | 136,8 mm | 27,0 | 109,8 | 6 | 1 |
| K- 07 25 10 51 | G 1/2 | 1500 | 68,8 | 166,6 mm | 34,5 | 132,1 | 15 | 2 |

Rezervni delovi

| | |
|----------------------------------|---------------------------|
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |