


K-SCHALLDAE SINTERBR FL MS

Silencers, sintered bronze, flat design with brass hexagon nut and brass thread

HANSA FLEX

Osobine

| | |
|-------------------|-------------------|
| Radni pritisak | maks. 10 bara |
| Radna temperatura | -10 °C to +200 °C |
| Nivo buke 6bara | 80 ~ 90 dB(A) |

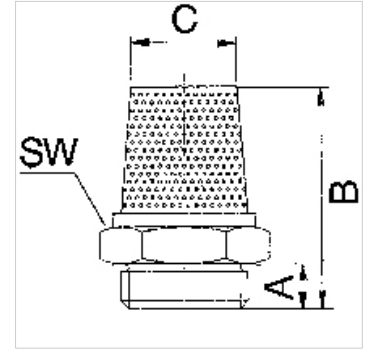

Opis

For reducing the exhaust noise generated by pneumatic equipment.

Artikal

| Naziv | Navoj | A (mm) | B (mm) | C (mm) | SW |
|----------------|-------|-----------|-----------|-----------|-------|
| K- 07 40 35 16 | M 5 | 4,0 | 7,6 | 6,0 | 8 mm |
| K- 07 40 35 17 | G 1/8 | 5,5 | 10,5 | 11,0 | 13 mm |
| K- 07 40 35 18 | G 1/4 | 7,0 | 13,5 | 13,0 | 17 mm |
| K- 07 40 35 19 | G 3/8 | 7,5 | 16,0 | 17,0 | 22 mm |
| K- 07 40 35 20 | G 1/2 | 9,5 | 18,0 | 20,0 | 24 mm |