

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Osobine

Temperaturni opseg -20 °C to +60 °C

Pritisak Max. 12 bar



Područje pritiska Max. 12 bar

Temperatura -20 °C to +60 °C

Protok 0 - 400 l/min

Opruga Stainless-steel

Kućište Brass

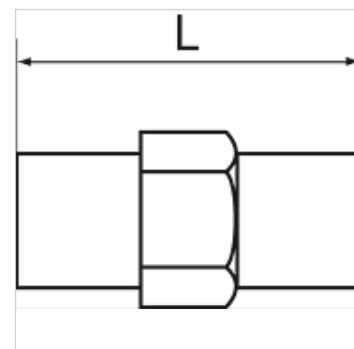

Napomena

Ostali podaci na upit.

Opis

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Artikal

| Naziv | Navoj | Unapred podešeni radni pritisak | L (mm) |
|----------------|------------------|---------------------------------|-----------|
| K- 07 25 03 03 | G 1/4 außen/male | 2 bar | 24,0 |
| K- 07 25 03 04 | G 1/4 außen/male | 4 bar | 24,0 |
| K- 07 25 03 05 | G 1/4 außen/male | 6 bar | 24,0 |