

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

Osobine

Temperaturni opseg	-20 °C to +60 °C
Pritisak	Max. 12 bar
Područje pritiska	Max. 12 bar
Temperatura	-20 °C to +60 °C
Protok	0 - 400 l/min
Opruga	Stainless-steel
Kućište	Brass



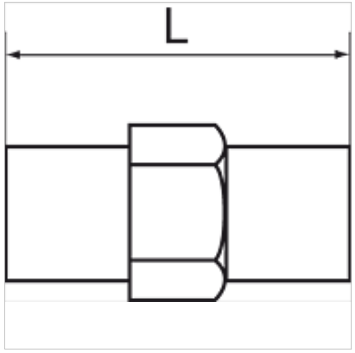

Napomena

Ostali podaci na upit.

Opis

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Artikal

Naziv	Navoj	Unapred podešeni radni pritisak	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.