



# K-WTST SAFETY BK SCHA AN FILR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and filter regulator

**HANSA FLEX**

## Osobine

|  |   |
|--|---|
| Ulazni pritisak                            | 2.5 - 16 bar  |
| Izlazni pritisak                           | 0.5 - 8 bar   |
| Temperaturni opseg                         | -10 °C to +50 °C  |
| Mediji                                     | Komprimovani vazduh   |
| Zapivni materijal                          | NBR   |
| Priključni navoj                           | Material: Die-cast zinc   |
| Posuda                                     | Polycarbonate (with bayonet lock) and bowl guard                  |
| Element filtera                            | Cellpor (PE) 5 µm   |
| Kućište                                    | Material: Grivory® (PA 66)  |
| Membrana                                   | NBR   |
| Sopstvena potrošnja vazduha                | Max. 1.5 l/min (depending on secondary pressure)                  |
| Merenje vrednosti protoka                  | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| Priključak za odzračivanje Kuglični ventil | Silencer  |

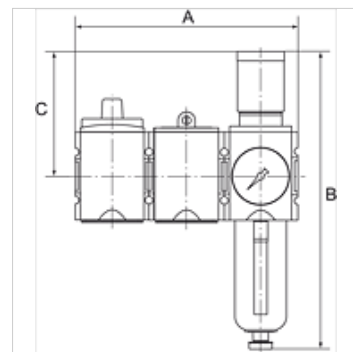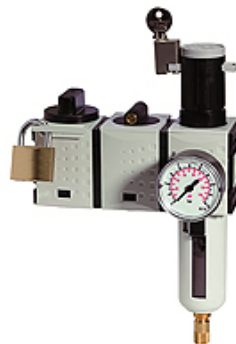

## Napomena

Ostali podaci na upit.

## Opis

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Napomene u vezi porudžbine

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Artikal

| Naziv          | Navoj | Protok (L/min) | A (mm) | B        | C (mm) | Ispust kondenzata |
|----------------|-------|----------------|--------|----------|--------|-------------------|
| K- 07 25 15 26 | G 1/4 | 2000           | 156,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 15 27 | G 3/8 | 2000           | 156,0  | 225,0 mm | 95,5   | Semi              |
| K- 07 25 15 28 | G 3/8 | 4300           | 189,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 15 29 | G 1/2 | 4300           | 189,0  | 257,0 mm | 110,0  | Semi              |
| K- 07 25 15 30 | G 3/4 | 10000          | 255,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 15 31 | G 1   | 10000          | 255,0  | 329,0 mm | 137,0  | Semi              |
| K- 07 25 15 32 | G 1/4 | 2000           | 156,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 15 33 | G 3/8 | 2000           | 156,0  | 243,0 mm | 95,5   | Auto              |
| K- 07 25 15 34 | G 3/8 | 4300           | 189,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 15 35 | G 1/2 | 4300           | 189,0  | 274,0 mm | 110,0  | Auto              |
| K- 07 25 15 36 | G 3/4 | 10000          | 255,0  | 343,0 mm | 137,0  | Auto              |
| K- 07 25 15 37 | G 1   | 10000          | 255,0  | 343,0 mm | 137,0  | Auto              |

## Pribor

|                    |          |
|--------------------|----------|
| K-STECKSCHLOSS     | Key lock |
| K-VORHAENGESCHLOSS | Padlock  |