
# K-WTST SAFETY BK SCHA AN HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and 2-piece service unit

## Osobine

| | |
|---|---|
| **Ulazni pritisak** | 2.5 - 16 bar |
| **Izlazni pritisak** | 0.5 - 8 bar |
| **Temperaturni opseg** | -10 °C to +50 °C |
| **Mediji** | Komprimovani vazduh |
| **Zaptivni materijal** | NBR |
| **Priključni navoj** | Material: Die-cast zinc |
| **Posuda** | Polycarbonate (with bayonet lock) and bowl guard |
| **Elemenat filtera** | Cellpor (PE) 5 µm |
| **Kućište** | Material: Grivory® (PA 66) |
| **Membrana** | NBR |
| **Sopstvena potrošnja vazduha** | Max. 1.5 l/min (depending on secondary pressure) |
| **Merenje vrednosti protoka** | At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar |
| **Priključak za odzračivanje Kuglični ventil** | Silencer |



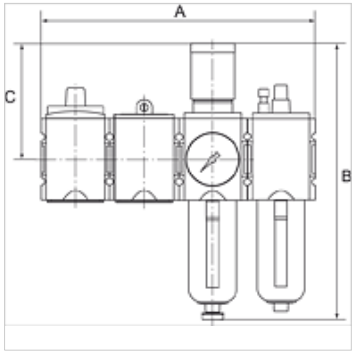


## Napomena

Ostali podaci na upit.

## Opis

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Napomene u vezi porudžbine

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Artikal

| Naziv | Navoj | Protok (L/min) | A (mm) | B | C (mm) | Ispust kondenzata |
|---|---|---|---|---|---|---|
| **K- 07 25 15 38** | G 1/4 | 1750 | 208,0 | 225,0 mm | 95,5 | Semi |
| **K- 07 25 15 39** | G 3/8 | 1750 | 208,0 | 225,0 mm | 95,5 | Semi |
| **K- 07 25 15 40** | G 3/8 | 3500 | 252,0 | 257,0 mm | 110,0 | Semi |
| **K- 07 25 15 41** | G 1/2 | 3500 | 252,0 | 257,0 mm | 110,0 | Semi |
| **K- 07 25 15 42** | G 3/4 | 10000 | 340,0 | 329,0 mm | 137,0 | Semi |
| **K- 07 25 15 43** | G 1 | 10000 | 340,0 | 329,0 mm | 137,0 | Semi |
| **K- 07 25 15 44** | G 1/4 | 1750 | 208,0 | 243,0 mm | 95,5 | Auto |
| **K- 07 25 15 45** | G 3/8 | 1750 | 208,0 | 243,0 mm | 95,5 | Auto |
| **K- 07 25 15 46** | G 3/8 | 3500 | 252,0 | 274,0 mm | 110,0 | Auto |
| **K- 07 25 15 47** | G 1/2 | 3500 | 252,0 | 274,0 mm | 110,0 | Auto |
| **K- 07 25 15 48** | G 3/4 | 10000 | 340,0 | 343,0 mm | 137,0 | Auto |
| **K- 07 25 15 49** | G 1 | 10000 | 340,0 | 343,0 mm | 137,0 | Auto |

## Pribor

| | |
|---|---|
| **K-STECKSCHLOSS** | Key lock |
| **K-VORHAENGESCHLOSS** | Padlock |

*Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.*