


# K-DRG DRV 250 NIEDERDRUCK

DRV 250 pressure regulators, low-pressure type

**HANSA FLEX**

## Osobine

|                    |   |
|--------------------|---|
| Ulazni pritisak    | Max. 25 bar (Series 200 and 300 Series), Max. 40 bar (400 Series)     |
| Temperaturni opseg | Max. 75 °C  |
| Odnos redukcije    | Max. 10:1 (200 Series), Max. 20:1 (300 Series), Max. 6:1 (400 Series) |
| Zaptivni materijal | NBR   |
| Poklopac opruge    | Pressed brass up to DN 25, Grey cast iron from DN 32                  |
| Kućište            | Red brass 2.1096.01   |

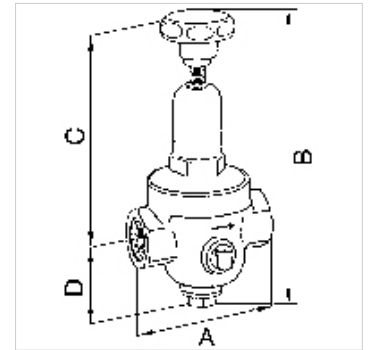

## Napomena

Ostali podaci na upit.

## Opis

Diaphragm pressure regulators with non-self-relieving design and non-pressure-reduced single-seated valve. Very precise adjustment. Good response characteristic because of only a few moving parts which hence minimal friction. Ideal for compressed air, nitrogen and other neutral, non-flammable gases, but only suitable for liquids with comparatively low flow rates.

## Napomene u vezi porudžbine

Ostali modeli na zahtev

## Dodatne informacije

Ostali modeli na zahtev

## Artikal

| Naziv          | Navoj | Opseg regulacije | kvs-vrednost protoka (m <sup>3</sup> /h) | A (mm) | B        | C (mm) | D (mm) |
|----------------|-------|------------------|--|--------|----------|--------|--------|
| K- 07 25 04 94 | G 1/4 | 0.2 - 2 bar      | 0,5                                      | 70,0   | 185,5 mm | 140,0  | 45,5   |
| K- 07 25 04 95 | G 3/8 | 0.2 - 2 bar      | 0,6                                      | 70,0   | 185,5 mm | 140,0  | 45,5   |
| K- 07 25 04 96 | G 1/2 | 0.2 - 2 bar      | 1,2                                      | 85,0   | 232,5 mm | 186,0  | 46,5   |

## Rezervni delovi

K-VERSCHLEI-SATZ Set of wearing parts