


# K-DRG WASSER NIEDRIGER HINTERDRUCK

Pressure regulators for water, low outlet pressure (max. 2 bar)

**HANSA FLEX**

## Osobine

<b>Ulazni pritisak</b>	Max. 16 bar (low-pressure type), Max. 25 bar (high-pressure type)
<b>Pretpritisak</b>	Min. 1.2 bar (low-pressure type), Max. 2.5 bar (high-pressure type)
<b>min. padovi pritiska</b>	1 bar
<b>Radna temperatura</b>	Max. 75 °C
<b>Zaptivke</b>	NBR-SBR
<b>Poklopac opruge</b>	Plastic PA 6 (up to DN 32, low-presure type), Hot-pressed brass (up to DN 32, high-pressure type), Cast iron (from DN 40)
<b>Kućište</b>	Bronze (Rg5)
<b>Unutrašnji delovi</b>	Plastic, brass, stainless steel

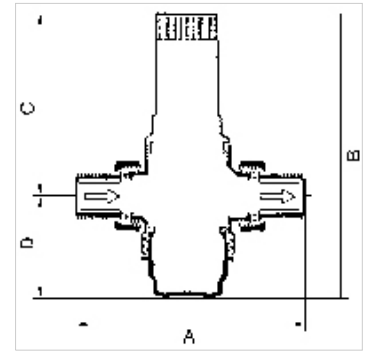

## Napomena

Ostali podaci na upit.

## Opis

Pressure regulator with pressure-reduced single-seated piston valve or single-seated diaphragm valve and built-in strainer. Specially designed for use with water. <br>The device is also suitable for all other applications involving neutral non-sticky liquids, air and neutral non-flammable gases.

## Artikal

Naziv	Navoj	DN	Opseg regulacije	kvs-vrednost protoka (m <sup>3</sup> /h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 51	R 1/2	15	0.2 - 2 bar	2,9	137,0	154,0 mm	127,0	27,0
K- 07 25 04 52	R 3/4	20	0.2 - 2 bar	3,9	141,0	154,0 mm	127,0	27,0
K- 07 25 04 53	R 1	25	0.2 - 2 bar	5,4	160,6	154,0 mm	126,0	28,5
K- 07 25 04 54	R 1 1/4	32	0.2 - 2 bar	6,1	177,2	156,0 mm	109,0	47,0
K- 07 25 04 55	R 1 1/2	40	0.2 - 2 bar	12,0	210,0	359,0 mm	300,0	59,0
K- 07 25 04 56	R 2	50	0.2 - 2 bar	13,0	210,0	361,0 mm	300,0	61,0

## Rezervni delovi

**K-DICHTSAETZE DRUCKREGLER** Seal kits Pressure regulators for drinking water, DVGW-tested acc. to EN 1567 and for water and liquid