


K-3/2 ABSPERRVENTILE HW SCHL G-MINI

3/2-way shut-off valve

HANSA FLEX

Osobine

| | |
|---------------------------|-------------------------------------------------------------------|
| Ulazni pritisak | 0 - 9 bar |
| Temperatura medija | max. 70 °C |
| Temperatura okoline | Max. 70 °C |
| Prikjučak za odzračivanje | G 1/4 |
| Zaptivni materijal | NBR |
| Kućište | Die-cast aluminium |
| Pritega | Plastic |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Ostali podaci | User manual on request |

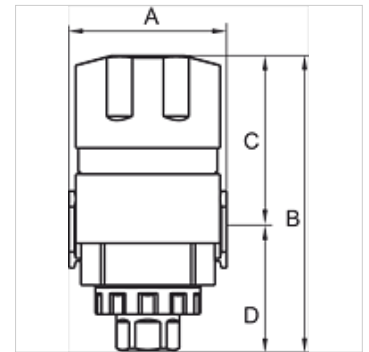

Artikal

| Naziv | Navoj | Protok (L/min) | A (mm) | B | C (mm) | D (mm) | Konstrukciona veličina |
|----------------|-------|-------------------|-----------|---------|-----------|-----------|------------------------|
| K- 07 25 12 29 | G 1/8 | 1750 | 38,0 | 89,0 mm | 52,5 | 36,5 | 200 |
| K- 07 25 12 30 | G 1/4 | 1750 | 38,0 | 89,0 mm | 52,5 | 36,5 | 200 |

Pribor

| | |
|-----------------------|-----------------|
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |
| K-HALTERBAUSATZ | Holder |