



# K-XRD STECKANSCHLUSS Z SCH AGR OR

Straight non-return valves, flow direction from port to tube, parallel male thread with O-ring

**HANSA FLEX**

## Osobine

|                    |  |
|--------------------|--|
| Radni pritisak     | Max. 10 bar, vacuum  |
| Oblast primene     | Air, vacuum  |
| preporučena creva  | PU or PA (nylon)   |
| Mediji             | Komprimovani vazduh  |
| Norma              | M thread acc. to DIN 13-1, with O-Ring<br>G thread acc. to DIN EN ISO 228-1, with O-Ring |
| Temperaturni opseg | 0 °C to +60 °C   |
| Zaptivna površina  | O-ring (NBR)   |
| Materijal          | Plastic, Nickel plated brass   |
| Pritisni prsten    | Plastic  |

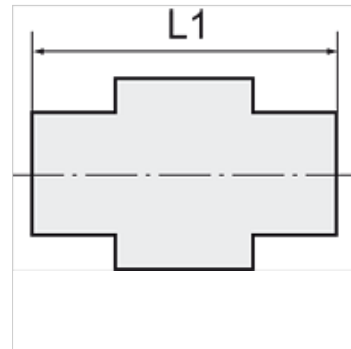

## Napomena

Ostali podaci na upit.

## Opis

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Artikal

| Naziv          | Navoj | Ø mm za crevo spolja | L1 (mm) | Pritisak otvaranja (bar) | SW    |
|----------------|-------|----------------------|---------|--------------------------|-------|
| K- 07 40 08 73 | M 5   | 4 mm                 | 31,0    | 0,2                      | 10 mm |
| K- 07 40 08 68 | G 1/8 | 4 mm                 | 24,2    | 0,2                      | 14 mm |
| K- 07 40 08 69 | G 1/8 | 6 mm                 | 31,0    | 0,2                      | 14 mm |
| K- 07 40 08 70 | G 1/8 | 8 mm                 | 32,8    | 0,2                      | 14 mm |
| K- 07 40 08 66 | G 1/4 | 6 mm                 | 33,0    | 0,2                      | 17 mm |
| K- 07 40 08 67 | G 1/4 | 8 mm                 | 34,8    | 0,2                      | 17 mm |
| K- 07 40 08 71 | G 3/8 | 10 mm                | 41,0    | 0,2                      | 20 mm |
| K- 07 40 08 72 | G 3/8 | 12 mm                | 42,5    | 0,2                      | 21 mm |
| K- 07 40 08 64 | G 1/2 | 10 mm                | 43,0    | 0,2                      | 24 mm |
| K- 07 40 08 65 | G 1/2 | 12 mm                | 44,5    | 0,2                      | 24 mm |