


K-T-STECK VB MINI

Union tees, mini

HANSA FLEX

Osobine

Radni pritisak	Max. 10 bar, vacuum
Oblast primene	Air, vacuum
preporučena creva	PU or PA (nylon)
Mediji	Komprimovani vazduh
Temperaturni opseg	0 °C to +60 °C
Materijal	Plastic, Nickel plated brass
Pritisni prsten	Plastic

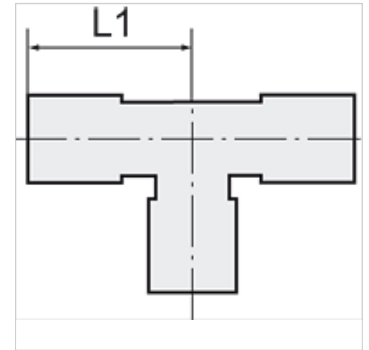

Napomena

Ostali podaci na upit.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikal

Naziv	Ø mm za crevo spolja	L1 (mm)
K- 07 40 23 40	3 mm	11,8
K- 07 40 23 41	4 mm	14,5
K- 07 40 23 42	6 mm	16,0