


# K-WV 5/2 MANU K DREHHEB SCHALT M5

5/2-way valve, manually operated, with short wing lever, monostable, for panel mounting

**HANSA FLEX**

## Osobine

|                           |  |
|---------------------------|--|
| Radni pritisak            | 0 - 10 bar   |
| Temperaturni opseg        | -20 °C to +70 °C   |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Telo ventila              | Aluminium alloy  |

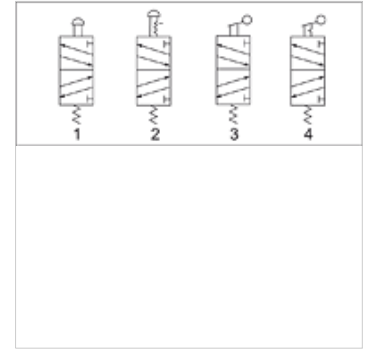

## Napomena

Ostali podaci na upit.

## Artikal

| Naziv          | Priključak | Priključak za odzračivanje | Protok (L/min) | Boja poluga za uključivanje i isključivanje | Broj plana uključivanja |
|----------------|------------|----------------------------|----------------|---|-------------------------|
| K- 07 15 03 02 | G 1/8      | G 1/8                      | 450            | Black                                       | 3                       |
| K- 07 15 03 03 | G 1/8      | G 1/8                      | 450            | Red   | 3                       |
| K- 07 15 03 04 | G 1/8      | G 1/8                      | 450            | green                                       | 3                       |
| K- 07 15 03 05 | G 1/4      | G 1/8                      | 550            | Black                                       | 3                       |
| K- 07 15 03 06 | G 1/4      | G 1/8                      | 550            | Red   | 3                       |
| K- 07 15 03 07 | G 1/4      | G 1/8                      | 550            | green                                       | 3                       |