

K-XRD STECKANSCHLUSS

Straight non-return valves with plug connection

HANSA FLEX

Osobine

Radni pritisak Max. 10 bar, vacuum

Oblast primene Air, vacuum

preporučena creva PU or PA (nylon)


Mediji Komprimovani vazduh

Temperaturni opseg 0 °C to +60 °C

Zaptivna površina O-ring (NBR)

Materijal Plastic, Nickel plated brass

Pritisni prsten Plastic

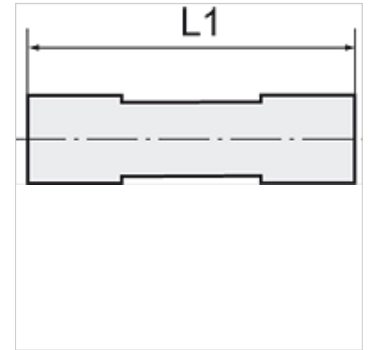

Napomena

Ostali podaci na upit.

Opis

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Artikal

Naziv	Ø mm za crevo spolja	L1 (mm)	Pritisak otvaranja (bar)
K- 07 40 09 02	4 mm	47,0	0,2
K- 07 40 09 03	6 mm	46,0	0,2
K- 07 40 09 04	8 mm	51,0	0,2
K- 07 40 09 05	10 mm	62,0	0,2
K- 07 40 09 06	12 mm	64,0	0,2