

K-UEM MS NI

Hexagonal swivel nuts - nickel plated brass



HANSA FLEX

Osobine

Radna temperatura Max. 150 °C

Pritisak Max. 60 bar

Materijal Mesing, niklovan

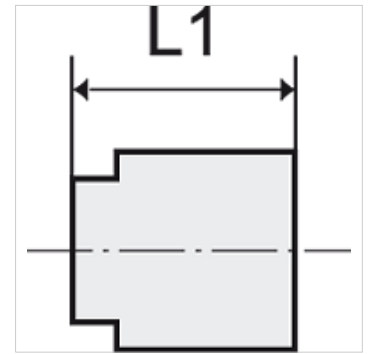

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ostali podaci na upit.

Opis

Suitable for air, water, oil, steam, etc.

Dodatne informacije

Further types and dimensions on request.

Artikal

| Naziv | Navoj | za veličine naglavka | L1 (mm) | SW |
|----------------|-------|------------------------|------------|-------|
| K- 07 40 44 22 | G 1/8 | I.D. 4, I.D. 6 | 13,0 | 14 mm |
| K- 07 40 44 23 | G 1/4 | I.D. 4, I.D. 6 | 15,0 | 17 mm |
| K- 07 40 44 24 | G 3/8 | I.D. 9 | 15,0 | 19 mm |
| K- 07 40 44 25 | G 1/2 | I.D. 4, I.D. 6, I.D. 9 | 16,0 | 24 mm |