

# K-UEM MS NI

Hexagonal swivel nuts - nickel plated brass



**HANSA FLEX**

## Osobine

Radna temperatura Max. 150 °C

Pritisak Max. 60 bar

Materijal Mesing, niklovan

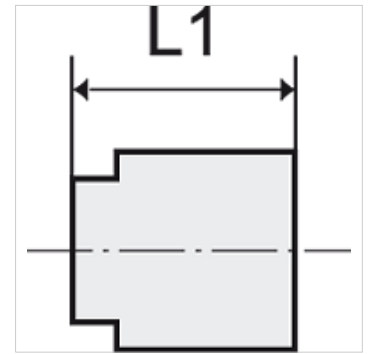

## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ostali podaci na upit.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikal

| Naziv          | Navoj | za veličine naglavka   | L1<br>(mm) | SW    |
|----------------|-------|------------------------|------------|-------|
| K- 07 40 44 22 | G 1/8 | I.D. 4, I.D. 6         | 13,0       | 14 mm |
| K- 07 40 44 23 | G 1/4 | I.D. 4, I.D. 6         | 15,0       | 17 mm |
| K- 07 40 44 24 | G 3/8 | I.D. 9                 | 15,0       | 19 mm |
| K- 07 40 44 25 | G 1/2 | I.D. 4, I.D. 6, I.D. 9 | 16,0       | 24 mm |