


K-WV 5/3 PNEU ZENTRUM GESCHLOSS 4A

5/3-way pilot valve, mid-position closed

HANSA FLEX

Osobine

| | |
|---------------------------------|--|
| Radni pritisak | 1.5 - 8 bar |
| Temperaturni opseg | Up to +70 °C |
| Merenje vrednosti protoka | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Priključak upravljačkog vazduha | G 1/8 |
| Telo ventila | Aluminium alloy |

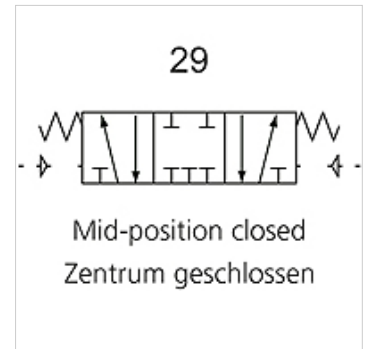

Napomena

Ostali podaci na upit.

Artikal

| Naziv | Priključak | Priključak za odzračivanje | Protok (L/min) | Broj plana uključivanja | Konstrukciona veličina |
|----------------|------------|----------------------------|----------------|-------------------------|------------------------|
| K- 07 15 04 21 | M 5 | M 5 | 250 | 29 | 100 |
| K- 07 15 04 22 | G 1/8 | G 1/8 | 400 | 29 | 100 |
| K- 07 15 04 23 | G 1/8 | G 1/8 | 550 | 29 | 200 |
| K- 07 15 04 24 | G 1/4 | G 1/8 | 550 | 29 | 200 |
| K- 07 15 04 25 | G 1/4 | G 1/4 | 950 | 29 | 300 |
| K- 07 15 04 26 | G 3/8 | G 1/4 | 950 | 29 | 300 |
| K- 07 15 04 27 | G 1/2" | G 1/2 | 1600 | 29 | 400 |