


# K-VT 2 ABGAENGE G-MINI

Manifolds

**HANSA FLEX**

## Osobine

|                     |                        |
|---------------------|------------------------|
| Ulazni pritisak     | 0 - 9 bar              |
| Temperatura medija  | max. 70 °C             |
| Temperatura okoline | Max. 70 °C             |
| Kućište             | Die-cast aluminium     |
| Ostali podaci       | User manual on request |

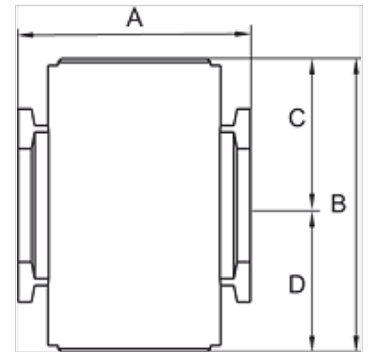

## Artikal

| Naziv          | Navoj | A<br>(mm) | B       | C<br>(mm) | D<br>(mm) | Konstrukciona veličina |
|----------------|-------|-----------|---------|-----------|-----------|------------------------|
| K- 07 25 12 31 | G 1/8 | 28,5      | 36,0 mm | 18,0      | 18,0      | 200                    |
| K- 07 25 12 32 | G 1/4 | 28,5      | 36,0 mm | 18,0      | 18,0      | 200                    |

## Pribor

|                      |                 |
|----------------------|-----------------|
| K-VERBINDUNGELEMENTE | Connecting sets |
| K-WANDHALTER         | Wall bracket    |