



# K-STECKVERBINDU RED VA

Reducers

**HANSA FLEX**

## Osobine

Pulsirajući radni pritisak	Max. 10 bar
Pritisak	Max. 15 bar (depending on pipe quality)
pogodan materijal cevi	PVDF, PTFE, stainless steel, PA, PU
Temperatura okoline	-20 °C to max. +150 °C (depending on pipe quality and diameter)
Materijal	Plemeniti čelik 1.4404
Zaptivni materijal	FKM

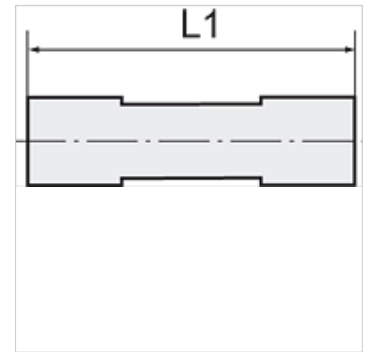

## Napomena

Ostali podaci na upit.

## Opis

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Artikal

Naziv	Ø mm za crevo spolja	L1 (mm)
K- 07 40 46 78	6 mm / 4 mm	31,0
K- 07 40 46 79	8 mm / 6 mm	34,0