

K-BKR MINI VA AG

Mini ball valves, stainless steel, 2 x male thread

HANSA FLEX

Osobine

Radni pritisak max. 64 bar

Radna temperatura -20 °C to +120 °C


Zaptivka FKM (FPM)

Kučíšte Stainless steel 1.4401 (AISI 316)

Ručna poluga Aluminium

Zaptivka kugle PTFE

Vreteno Stainless steel 1.4401 (AISI 316)

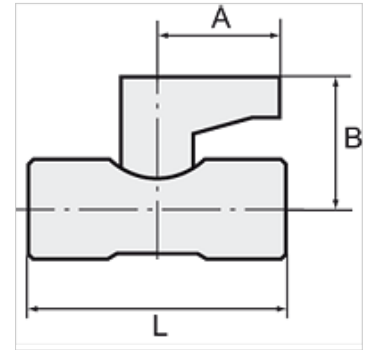

Napomena

Ostali podaci na upit.

Artikal

| Naziv | DN | Navoj | A (mm) | B (mm) | L (mm) |
|----------------|----|-------|-----------|-----------|-----------|
| K- 07 30 20 19 | 7 | G 1/4 | 22,8 | 26,5 | 50,0 |
| K- 07 30 20 20 | 7 | G 3/8 | 22,8 | 26,5 | 50,0 |
| K- 07 30 20 21 | 9 | G 1/2 | 22,8 | 28,3 | 58,0 |