

K-L-STECK STECKNIPPEL VB MINI

Union elbows with push-in plug, mini

HANSA FLEX

Osobine

Radni pritisak Max. 10 bar, vacuum

Oblast primene Air, vacuum


preporučena creva PU or PA (nylon)

Mediji Komprimovani vazduh

Temperaturni opseg 0 °C to +60 °C

Materijal Plastic, Nickel plated brass

Pritisni prsten Plastic

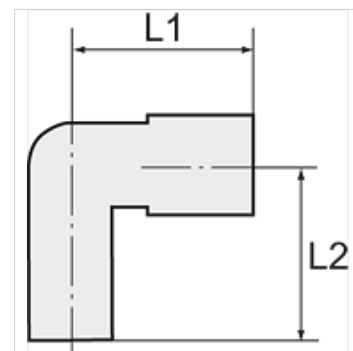

Napomena

Ostali podaci na upit.

Opis

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Artikal

Naziv	Ø mm za crevo spolja	L1 (mm)	L2 (mm)	Utični nastavak (mm)
K- 07 40 50 07	3 mm	11,5	26,6	3
K- 07 40 50 08	4 mm	14,0	28,5	4
K- 07 40 50 09	6 mm	16,3	32,0	6