


K-LEITUNGSDRUCKREGLER 200 BAR

Inline pressure regulators up to 200 bar

HANSA FLEX

Osobine

| | |
|--------------------|--|
| Radni pritisak | max. 200 bar |
| Radna temperatura | -10 °C to +90 °C |
| Podešavanje | Knob (50 bar), Rotary switch (100 and 150 bar) |
| Zaptivni materijal | NBR |
| Materijal | Mesing |

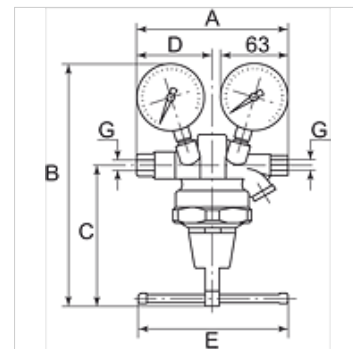

Napomena

Ostali podaci na upit.

Opis

Inline pressure regulator input pressure, suitable for compressed air, nitrogen and other neutral, compressed gases.

Artikal

| Naziv | Navoj | Opseg regulacije | Protok (L/min) | A (mm) | B | C (mm) | D (mm) | E (mm) |
|----------------|--------------|------------------|----------------|--------|----------|--------|--------|--------|
| K- 07 25 08 27 | G 1/4 female | 1 - 50 bar | 2500 | 162,0 | 188,5 mm | 100,0 | 76,0 | 50,0 |
| K- 07 25 08 28 | G 1/4 female | 1 - 100 bar | 2700 | 162,0 | 213,5 mm | 125,0 | 76,0 | 130,0 |
| K- 07 25 08 29 | G 1/4 female | 1 - 150 bar | 2900 | 162,0 | 213,5 mm | 125,0 | 76,0 | 130,0 |