


K-LEITUNGSDRUCKREGLER 200 BAR

Inline pressure regulators up to 200 bar

HANSA FLEX

Osobine

Radni pritisak	max. 200 bar
Radna temperatura	-10 °C to +90 °C
Podešavanje	Knob (50 bar), Rotary switch (100 and 150 bar)
Zaptivni materijal	NBR
Materijal	Mesing

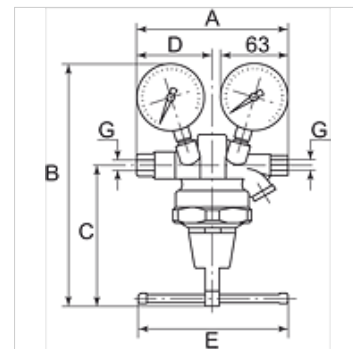

Napomena

Ostali podaci na upit.

Opis

Inline pressure regulator input pressure, suitable for compressed air, nitrogen and other neutral, compressed gases.

Artikal

Naziv	Navoj	Opseg regulacije	Protok (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
K- 07 25 08 27	G 1/4 female	1 - 50 bar	2500	162,0	188,5 mm	100,0	76,0	50,0
K- 07 25 08 28	G 1/4 female	1 - 100 bar	2700	162,0	213,5 mm	125,0	76,0	130,0
K- 07 25 08 29	G 1/4 female	1 - 150 bar	2900	162,0	213,5 mm	125,0	76,0	130,0