

# K-VLST L AG IG MS NI

Extensions, long, parallel - nickel-plated brass


**HANSA FLEX**

## Osobine

Radna temperatura Max. 150 °C

Pritisak Max. 60 bar

Materijal Mesing, niklovan

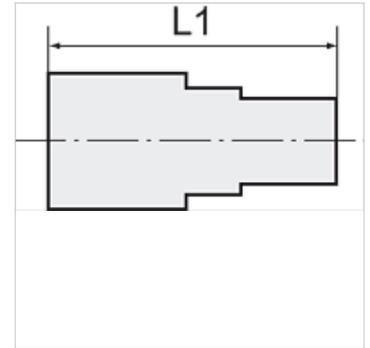

## Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Ostali podaci na upit.

## Opis

Suitable for air, water, oil, steam, etc.

## Dodatne informacije

Further types and dimensions on request.

## Artikal

Naziv	Spoljni navoj	Unutrašnji navoj	L1 (mm)	SW
K- 07 40 39 16	G 1/8	G 1/8	22,0	14 mm
K- 07 40 39 17	G 1/8	G 1/8	42,0	14 mm
K- 07 40 39 18	G 1/8	G 1/8	51,0	14 mm
K- 07 40 39 19	G 1/8	G 1/8	100,0	14 mm
K- 07 40 39 20	G 1/4	G 1/4	35,0	17 mm
K- 07 40 39 21	G 1/4	G 1/4	51,0	17 mm
K- 07 40 39 22	G 1/4	G 1/4	100,0	17 mm