

K-VLST L AG IG MS NI


Extensions, long, parallel - nickel-plated brass

Osobine

Radna temperatura Max. 150 °C

Pritisak Max. 60 bar

Materijal Mesing, niklovan

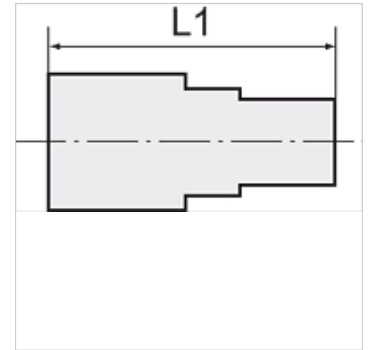

Napomena

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Ostali podaci na upit.

Opis

Suitable for air, water, oil, steam, etc.

Dodatne informacije

Further types and dimensions on request.

Artikal

| Naziv | Spoljni navoj | Unutrašnji navoj | L1 (mm) | SW |
|----------------|---------------|------------------|------------|-------|
| K- 07 40 39 16 | G 1/8 | G 1/8 | 22,0 | 14 mm |
| K- 07 40 39 17 | G 1/8 | G 1/8 | 42,0 | 14 mm |
| K- 07 40 39 18 | G 1/8 | G 1/8 | 51,0 | 14 mm |
| K- 07 40 39 19 | G 1/8 | G 1/8 | 100,0 | 14 mm |
| K- 07 40 39 20 | G 1/4 | G 1/4 | 35,0 | 17 mm |
| K- 07 40 39 21 | G 1/4 | G 1/4 | 51,0 | 17 mm |
| K- 07 40 39 22 | G 1/4 | G 1/4 | 100,0 | 17 mm |