
K-WV 5/2 LOCHBILD NAMUR

5/2-way spool valves with NAMUR style interface

Osobine

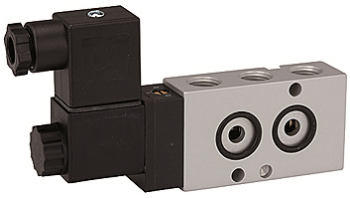

Mediji	Air, neutral gases, filtered
Radni pritisak	1.5 to 10 bar
Radna temperatura	-20 °C to +70 °C
Priključak na električnu mrežu	Plug connector PG 9
Sadržano u isporuci	Plug connector PG 9, 1 coding pin, 2 O-rings, 2 fixing screws
Apsorbovanje snage	3 W=/5 VA~
Kućište	Aluminium, anodised
Zasun	Stainless steel
Zaptivni materijal	NBR

Napomena

Ostali podaci na upit.

Opis

3/2 and 5/2-way spool valves, monostable, with air purging function and pneumatic spring return. With latching manual operator and optional outgoing air restriction.
Two or three-piece service units with excellent flow rates in modern design.
Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Artikal

Naziv	Napon	Priključak	DN	Protok (L/min)
K- 07 15 00 07	230 V, 50 Hz	G 1/4	7	1250
K- 07 15 00 08	24 V DC	G 1/4	7	1250

Uprkos pažljivom proveravanju, ne možemo isključiti greške i ne preuzimamo nikakvu garanciju za navedene podatke.